

- Plastic injection PC body
- Polycarbonate glass
- Operates with alternate or direct current
- Underwater connector
- H07RNF rubber cable
- Plastic injection mounting box (optional)

## P W Product & Power Options

| Product Name | Light Color | Input Voltage (V) | Power (W) | Luminous Flux (lm) | Weight (kg) |
|--------------|-------------|-------------------|-----------|--------------------|-------------|
| AC5GE18      | WW-NW-CW    | 24V DC            | 18        | 1.800              | 0,8         |

Power and Lumen values provided are based off of a "cold white (CW) LED". It may vary according to the desired color.

## C Light Color Options

|                     |       |            |       |
|---------------------|-------|------------|-------|
| ● WW: Warm White    | 3000K | ● R: Red   | 625nm |
| ● NW: Natural White | 4000K | ● G: Green | 525nm |
| ● CW: Cold White    | 6500K | ● B: Blue  | 465nm |

## S System Options

- 01 Standart (ON/OFF)
- 02 PWM-DIM



Bademlik, Eskişehir




Order Code

P . W . C . S



## Product Diagrams

Polar Diagram

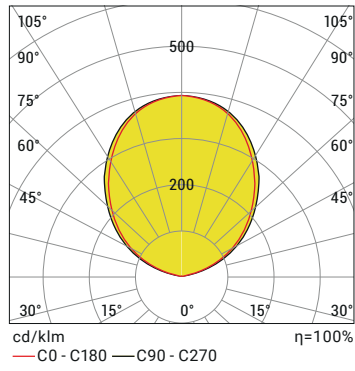

Conical Diagram

| H (mt) | Ø (m) | E <sub>max</sub> (lx) |
|--------|-------|-----------------------|
| 3.0    | 6,95  | 80                    |
| 2.5    | 5,79  | 116                   |
| 2.0    | 4,63  | 180                   |
| 1.5    | 3,48  | 321                   |
| 1.0    | 2,32  | 722                   |
| 0.5    | 1,16  | 2888                  |

AC5GE 18LED CW 120D 18W 12-24V DC IP68

## Accessories



34600134: Mounting Box

## Control System Options

| Color Type | PWM | INV PWM | DMX | DALI | 0-10V DC | TRIAC |
|------------|-----|---------|-----|------|----------|-------|
| WW-NW-CW   | •   |         |     | •    | •        |       |
| R,G,B,A    | •   |         |     | •    | •        |       |
| RGB        |     |         |     |      |          |       |
| RGBA/W     |     |         |     |      |          |       |
| RGB DMX    |     |         |     |      |          |       |
| WHITE DMX  |     |         |     |      |          |       |

| Product Code | Voltage (V DC) | Control Systems | Cable Core Quantity |     |         |
|--------------|----------------|-----------------|---------------------|-----|---------|
|              |                |                 | Mono                | RGB | RGB W/A |
| AC5GE        | 24             | PWM             | 2x                  | -   | -       |
|              | 12-24          | ON/OFF          | 2x                  | -   | -       |



Bademlik, Eskişehir