

- Electrostatic powder coating or anodized aluminum housing
- 4mm tempered glass
- Silicone seal with high protection level
- Aluminum injection molding covers
- Stainless fitting and clips
- Electrostatic painted aluminum injection assembly foot (adjustable for vertical-horizontal-angled mounting)
- 6kV/10kV lighting protective circuit
- NEMA Socket Infrastructure
- Light distribution options suitable for all road conditions
- Power and angle options for all pole types

P W Product & Power Options

Product Name	Light Color	Input Voltage (V)	Power (W)	Luminous Flux (lm)	Weight (kg)
AYDAN9	WW-NW-CW	220-240V AC	60	7.200	4,4
AYDAN9	WW-NW-CW	220-240V AC	83	9.960	4,4

*Power and Lumen values provided are based off of a "cold white (CW) LED".

C Light Color Options


WW: Warm White	3000K
NW: Natural White	4000K
CW: Cold White	6500K

*Different colors are optional


S Driver Options

- 01 Standard Driver
- 06 DALI Driver
- 27 Programmable LED Driver


O Lens Options



G Housing Color Options




M Mounting Options




Order Code

P . W . C . S . O . G . M



Product Diagrams

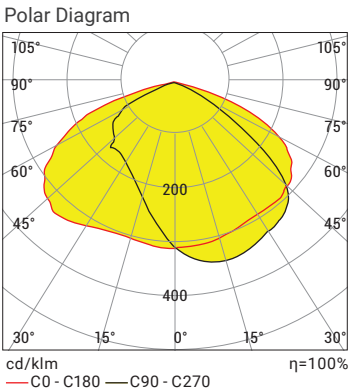

Control System Options

Color Type	PWM	INV PWM	DMX	DALI	0-10V DC	TRIAC
WW-NW-CW				•	•	
R,G,B,A						
RGB						
RGBA/W						
RGB DMX						
WHITE DMX						



Salaris Mall, Russia

