

- Professional LED light source architectural spotlight
- Optical solutions with 5 different beam angles
- MultiColor and FullColor LED Technology
- Electrostatic powder-coated aluminum body
- Operating temperature: -20 to +40 °C
- Glare shield option
- Optional honeycomb louver
- 5 different mounting options
- Adjustable angled mounting bracket
- Sleek and aesthetic design

P W Product & Power Options

Product Name	Light Color	Voltage (V)	Power (W)	Luminous Flux (lm)
BELLA-1	WW-NW-CW	220-240VAC	4	310
BELLA-1-DMX	RGB	48VDC	4	-
BELLA-1-DMX	RGBW	48VDC	4	-

*Power and Lumen values provided are based off of a coverless product with cold white (CW) LED.

C Light Color Options


● WW: Warm White	2700K	● R: Red 625nm ● G: Green 525nm ● B: Blue 465nm RGB RGBW
● WW: Warm White	3000K	
● NW: Natural White	4000K	
● CW: Cold White	5700K	
● CW: Cold White	6500K	

*Different colors are optional


S Driver Options

- 01 Standart Driver
- 06 DALI Driver


G Body Color Options

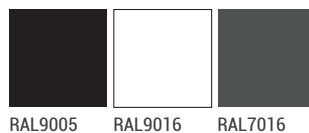

O Lens Options

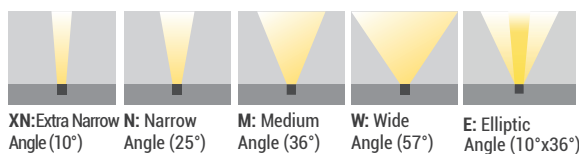

M Mounting Options

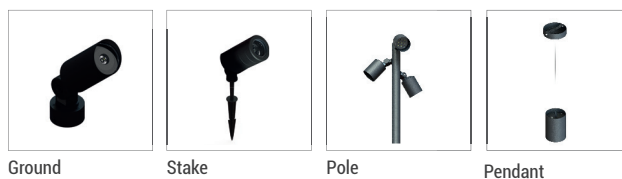


Order Code


P W C S G O M U



Product Diagrams

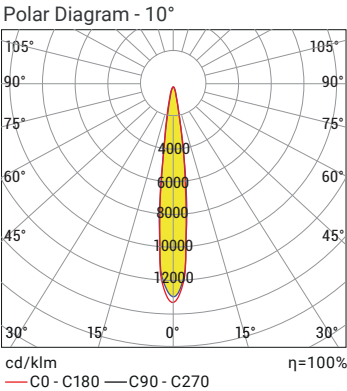

U Upper Cover Options



Control System Options

Color Type	PWM	INV PWM	DMX	DALI	1-10V DC	TRIAC
WW-NW-CW				•	•	
RGB			•			
RGBW			•			