

- Min. 20 micron anodized aluminum extruded profile
- High efficient homogeneous light by plexiglas diffused cover
- Suitable for pendant mounting
- Product length standards are; 90cm, 120cm, 150cm and 180cm
- Different colors are applicable for the housing
- 1,5 m steel wire hangers are included
- The number of the hangers in the package may vary regarding the product size.

P W Product & Power Options


Product Name	Light Color	Input Voltage (V)	Power (W)	Luminous Flux (lm)	Dimensions (BxC) (mm)	Weight (kg)
BLZ90	WW-NW-CW	24V DC	105	7.875	900x150	7,3
BLZ90	WW-NW-CW	24V DC	150	11.250	900x150	7,3
BLZ120	WW-NW-CW	24V DC	150	11.250	1200x200	9,7
BLZ120	WW-NW-CW	24V DC	200	15.000	1200x200	9,7
BLZ150	WW-NW-CW	24V DC	250	18.750	1500x250	12,2
BLZ150	WW-NW-CW	24V DC	380	28.500	1500x250	12,2
BLZ180	WW-NW-CW	24V DC	300	22.500	1800x300	14,6
BLZ180	WW-NW-CW	24V DC	440	33.000	1800x300	14,6
BLZ90	RGB	24V DC	62	-	900x150	7,3
BLZ120	RGB	24V DC	87	-	1200x200	9,7
BLZ150	RGB	24V DC	145	-	1500x250	12,2
BLZ180	RGB	24V DC	175	-	1800x300	14,6

*Power and Lumen values provided are based off of a cold white (CW) LED.

C Light Color Options

● WW: Warm White 3000K	● R: Red 625nm
● NW: Natural White 4000K	● G: Green 525nm
● CW: Cold White 6500K	● B: Blue 465nm
● RGB	● A: Amber 590nm

G Housing Color/Coating Options

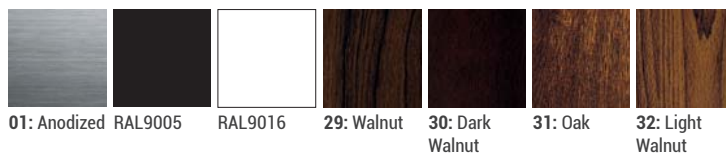

Order Code

P . W . C . G





Algorithm Business Center, Russia

Control System Options

	Color Type	PWM	INV PWM	DMX	DALI	0-10V DC	TRIAC
WW-NW-CW		•			•	•	
R,G,B,A		•			•	•	
RGB		•					
RGBA/W							
RGB DMX							
WHITE DMX							



Biz Cevahir Hotel, İstanbul