

600



- Anodized aluminum extruded profile
- Polycarbonate luminaire glass
- PVC side covers with invisible gland outlet and UV protection
- Stainless steel fixture stand
- High efficiency group lens
- IP68 air vent

P W Product & Power Options

Product Name	Light Color	Input Voltage (V)	Power (W)	Luminous Flux (lm)	Length (L) (mm)	Weight (kg)
C-WL216	RGBW	48V DC	16	-	600	0,5

*Power and Lumen values provided are based off of a " (60°) cold white (CW) LED".

C Light Color Options

● WW: Warm White	2700K	● R: Red	625nm
● WW: Warm White	3000K	● G: Green	525nm
● NW: Natural White	4000K	● B: Blue	465nm
● CW: Cold White	6500K	● A: Amber	590nm

*Different colors are optional

O Lens Options



N: Narrow Angle (30°)

XN: Ekstra Narrow Angle (10°)

N: Narrow Elliptic Angle (20°x60°)

W: Medium Angle (40°)

W: Wide Angle (60°)

J Junction Options




02: IP Socket

U Upper Cover




Glare Shield


K Cable Direction Options

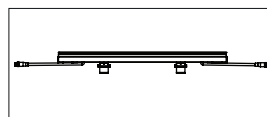

02: Dual entry and exit

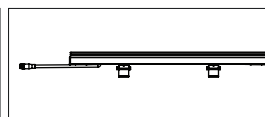

04: Left bottom exit

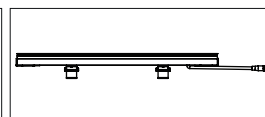


06: Right bottom exit




Order Code

P . W . C . S . O . J . K . M



Product Diagrams

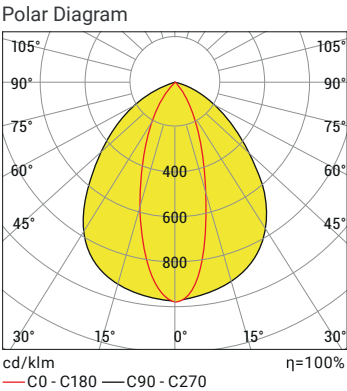

Control System Options

Color Type	PWM	INV PWM	DMX	DALI *	0-10V DC *	TRIAC
WW-NW-CW						
R,G,B,A						
RGB DMX						

