

- Electrostatic powder coated aluminum injection housing and steel front frame
- Polycarbonate front glass
- Stainless connectors
- Suitable for recessed mounting

P W Product & Power Options

Product Name	Light Color	Input Voltage (V)	Power (W)	Luminous Flux (lm)	Weight (kg)
CDP5 18	WW-NW-CW	220-240V AC	20	2.408	1,8
CDP5 18	WW-NW-CW	220-240V AC	36	3.465	1,9
CDP5 18	WW-NW-CW	220-240V AC	45	4.335	2,0
CDP5 18	WW-NW-CW	12-24V DC	22	2.185	1,7

*Power and Lumen values provided are based off of a "cold white (CW) LED".

C Light Color Options


● WW: Warm White	3000K
● NW: Natural White	4000K
● CW: Cold White	6500K

*Different colors are optional

S Driver Options

- 01 Standard Driver
- 06 DALI Driver
- 11 Driver + Emergency Lighting Kit 1h
- 12 Driver + Emergency Lighting Kit 3h

O Lens Options

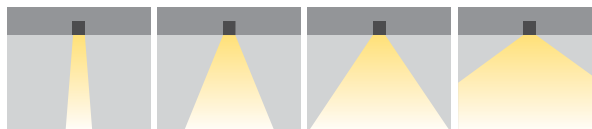

XN: Extra Narrow angle M: Medium angle W: Wide angle XW: Without lens

G Housing Color Options



RAL9005 RAL9016 RAL9007

The products are equipped with a black reflector as standard.

I IP Protection Class



*IP65 can only Fixed optimal




Order Code

P . W . C . S . O . G . I . M



Product Diagrams

Polar Diagram

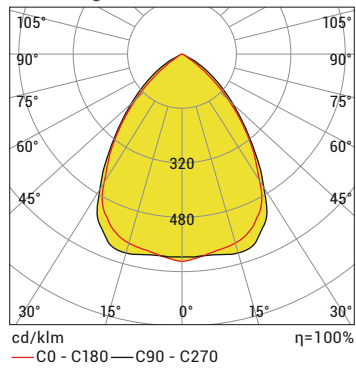

Conical Diagram

H (mt)	\emptyset (m)	Emax (lx)
0.5	0,80	10565
1.0	1,61	2641
1.5	2,41	1174
2.0	3,22	660
2.5	4,02	423
3.0	4,82	293

CDP5 CW 60D 45W 220VAC 50HZ



M Mounting Options



09: Fixed



10: Fixed Deep *



11: Deep movable*



12: Deep recessed movable*

*IP65 is not available

Control System Options

Color Type	PWM	INV PWM	DMX	DALI	0-10V DC	TRIAC
WW-NW-CW				•	•	•
R,G,B,A						
RGB						
RGBA/W						
RGB DMX						
WHITE DMX						