

- 5 mm 316 L chrome flange
- Electrostatic powder coated aluminum injection body
- 12 mm tempered glass
- Plastic injection installation box
- Underwater cable joint
- H07RNF rubber cable
- IP68 air vent

P W Product & Power Options

Product Name	Light Color	Input Voltage (V)	Power (W)	Luminous Flux (lm)	Weight (kg)
CF518	WW-NW-CW	220-240V AC	21	2.625	3,8
CF518	RGB	24V DC	25	-	3,5
CF518	RGBA/W	24V DC	26	-	3,5


*Power and Lumen values provided are based off of a "cold white (CW) LED".

C Light Color Options

● WW: Warm White 3000K	● R: Red 625nm	● RGB
● NW: Natural White 4000K	● G: Green 525nm	● RGBW
● CW: Cold White 6500K	● B: Blue 465nm	● RGBA
	● A: Amber 590nm	


*Different colors are optional.

O Lens Options

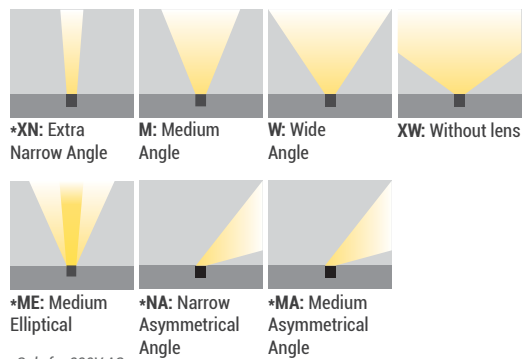

*Only for 220V AC


K Cable Direction Options

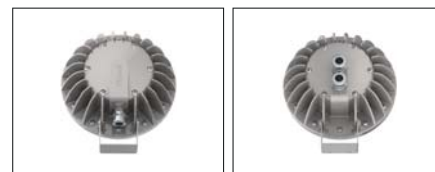

09: Single entry underneath the housing

10: Entry and exit on the cover*
*Only 24V DC

Mounting

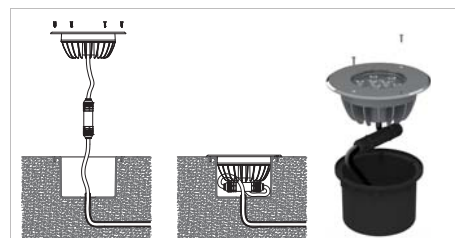


Order Code

P . W . C . O . K



Product Diagrams

Polar Diagram

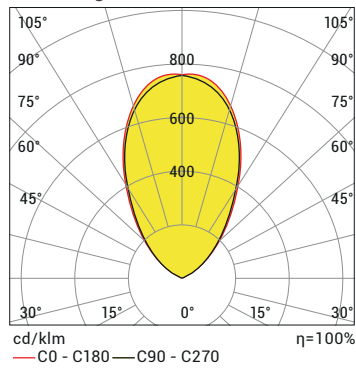

Conical Diagram

H (mt)	∅ (m)	E _{max} (lx)
3.0	3,85	137
1.5	3,21	197
2.0	2,57	308
1.5	1,93	548
1.0	1,28	1232
0.5	0,64	4929

CF5 P18 CW 60D 20W 220V AC IP67

Control System Options

Color Type	PWM	INV PWM	DMX*	DALI*	0-10V DC*	TRIAC
WW-NW-CW	•			•	•	
R,G,B,A	•			•	•	
RGB	•					
RGBA/W						
RGB DMX			•			
WHITE DMX			•			

*Only for 24V DC

Product Code	Voltage (V DC)	Control Systems	Cores of Cables Count		
			Mono	RGB	RGB W/A
CF518	24	PWM	2x	4x	-
	12-24	ON/OFF	2x	-	-
	12-24	INV-PWM	3x	-	-

