

- Electrostatic powder coated aluminum body
- Printed tempered glass cover
- Internal drive
- Suitable for indoor and outdoor

P W Product & Power Options

Product Name	Light Color	Input Voltage (V)	Power (W)	Luminous Flux (lm)	Dimensions (AxBxC) (mm)	Weight (kg)
DAMLA75	WW-NW-CW	220-240V AC	14	1410	75x75x123	0,9
DAMLA100	WW-NW-CW	220-240V AC	26	2900	100x100x155	1,4
DAMLA150	WW-NW-CW	220-240V AC	40	4630	150x150x225	2,7

*Power and Lumen values provided are based off of a Natural white (NW) LED.

C Light Color Options


● WW: Warm White	3000K
● NW: Natural White	4000K
● CW: Cold White	6500K

S Driver Options

- 01 Standard Driver
- 06 * DALI Driver
- 11 * Driver + Emergency Lighting Kit 1h
- 12 * Driver + Emergency Lighting Kit 3h


* Suitable for DAMLA150

O Lens Options

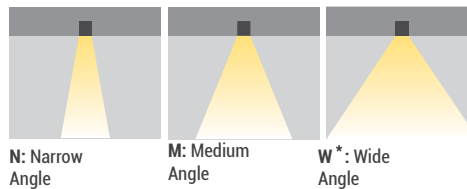

* Suitable for DAMLA150

G Housing Color Options



U Upper Pieces Options




00: Standart
01: Light Diffuser (Honeycomb)




Order Code

P . W . C . S . O . G . U




Product Diagrams

Polar Diagram

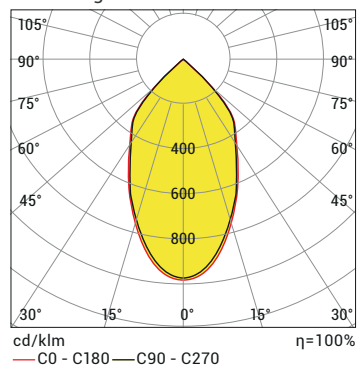

Conical Diagram

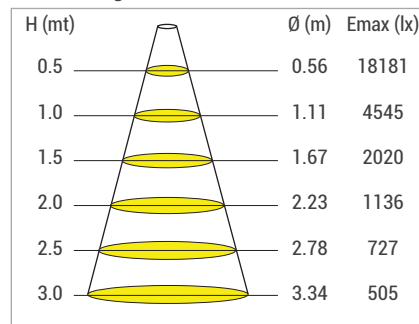

DAMLA150_A0001 NW40 40W 220VAC

Control System Options

Color Type	PWM	INV PWM	DMX	DALI	0-10V DC	TRIAC
WW-NW-CW				•	•	
R,G,B,A						
RGB						
RGBA/W						
RGB DMX						
WHITE DMX						