

- Min. 20 micron anodized aluminum extruded profile
- Stainless connectors
- PVC side cover with UV protection
- Transparent or diffused polycarbonate top cover with UV protection
- Suitable for surface mounting

P W Product & Power Options

Product Name	Light Color	Input Voltage (V)	Power (W)	Luminous Flux (lm)	Length (mm)	Weight (kg)
LLET120	WW-NW-CW	220V-240 AC	80	8.412	1236	2,8
LLET160	WW-NW-CW	220V-240 AC	115	12.075	1636	3,8

*Power and Lumen values provided are based off of a "cold white (CW) LED".

S Driver Options


- 01 Standard Driver
- 06 DALI Driver
- 11 Driver + Emergency Lighting Kit 1h
- 12 Driver + Emergency Lighting Kit 3h
- 16 Radar Sensor

C Light Color Options

- WW: Warm White 3000K
- NW: Natural White 4000K
- CW: Cold White 6500K

*Different colors are optional

J Junction Options




01: Cable




02: IP Socket

K Cable Direction Options



01: Single Entry



03: Dual end exit and entry




Order Code

P . W . C . S . J . K . U



Product Diagrams

Polar Diagram

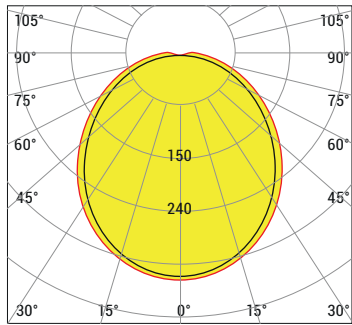


— C0 - C180 — C90 - C270

Conical Diagram

H (mt)	Ø (m)	E _{max} (lx)
0.5	1.27	5397
1.0	2.53	1349
1.5	3.80	600
2.0	5.06	337
2.5	6.33	216
3.0	7.60	150

LLET 160 CW 120D 85W 220V AC IP66 TRA. COVER

U Upper Cover Options



01: Diffused

02: Transparent

Control System Options

Color Type	PWM	INV PWM	DMX	DALI	0-10V DC	TRIAC
WW-NW-CW 				•	•	



Indoor Parking Lighting