

- Min. 20 micron anodized aluminum extruded profile.
- PVC side cover with UV protection
- Cooling capacity up to 12 W/m
- Suitable for recessed mounting on the ceiling

P W Product & Power Options

Product Name	Light Color	Input Voltage (V)	Power (W)	Luminous Flux (lm)	Cutting Dimensions (AxB)(mm)	Length (L) (mm)	Weight (kg)
LLGEN105	WW-NW-CW	220-240V AC	3	95	106x88	110	0,5
LLGEN170	WW-NW-CW	220-240V AC	7	200	171x88	175	0,9
LLGEN235	WW-NW-CW	220-240V AC	10	360	236x88	240	1,3
LLGEN105	WW-NW-CW	24V DC	3	95	106x88	110	0,4
LLGEN170	WW-NW-CW	24V DC	7	200	171x88	175	0,7
LLGEN235	WW-NW-CW	24V DC	10	360	236x88	240	1,1

*Power and Lumen values provided are based off of a "cold white (CW) LED".

C Light Color Options


● WW: Warm White	3000K
● NW: Natural White	4000K
● CW: Cold White	6500K

*Different colors are optional

I IP Protection Class



M Mounting Options

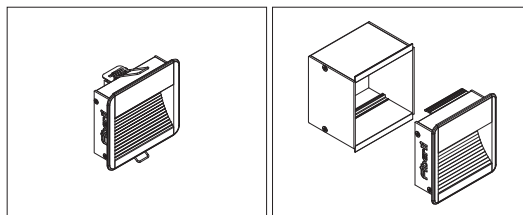


27: Flush Mount

28: Wall Mount




Order Code

P . W . C . I . M



Product Diagrams

Polar Diagram

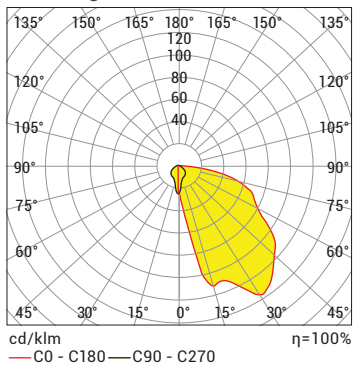

Control System Options

	Color Type	PWM	INV PWM	DMX	DALI	0-10V DC	TRIAC
WW-NW-CW		•			•	•	
R,G,B,A		•			•	•	
RGB		•					
RGBA/W							
RGB DMX							
WHITE DMX							

