

- Min. 20 micron anodized aluminum extruded profile
- Stainless connectors
- PVC end caps with UV protection
- Transparent or diffused polycarbonate top cover with UV protection
- Cooling capacity up to 21,6 W/m
- Suitable for surface mounting

P W Product & Power Options

Product Name/LED Quantity	Light Color	Input Voltage (V)	Power (W/mt)	Luminous Flux (lm)	Weight (kg)
LLK 30LED	WW-NW-CW	24V DC	2,4	240	0,30
LLK 30LED	WW-NW-CW	24V DC	12	1.350	0,30
LLK 45LED	WW-NW-CW	24V DC	18	2.025	0,30
LLK 60LED	WW-NW-CW	24V DC	4,8	480	0,30
LLK 60LED	WW-NW-CW	24V DC	7,2	720	0,30
LLK 60LED	WW-NW-CW	24V DC	14,4	1.440	0,30
LLK 90LED	WW-NW-CW	24V DC	7,2	720	0,30
LLK 90LED	WW-NW-CW	24V DC	10,8	1.100	0,30
LLK 120LED	WW-NW-CW	24V DC	9,6	960	0,30
LLK 180LED	WW-NW-CW	24V DC	14,4	1.450	0,30
LLK 30LED	RGB	24V DC	7,2	-	0,30
LLK 45LED	RGB	24V DC	10,8	-	0,30
LLK 60LED	RGB	24V DC	14,4	-	0,30
LLK 90LED	RGB	24V DC	21,6	-	0,30
LLK 60LED	RGB/W	24V DC	14,4	-	0,30
LLK 30LED-DMX	RGBW/A-Pixel	24V DC	8,2	-	0,30

*Power and Lumen values provided are based off of a coverless product with cold white (CW) LED.

** The same power values for white colors are applicable for R,G,B,A as well.

C Light Color Options

● WW: Warm White	3000K	● R: Red	625nm	● RGB
● NW: Natural White	4000K	● G: Green	525nm	● RGBW
● CW: Cold White	6500K	● B: Blue	465nm	● RGBA
		● A: Amber	590nm	

*Different colors are optional

J Junction Options



01: Cable (side output)

02: IP Socket (side output)

03: Horizontal Socket

04: Vertical Socket

06: Cable (bottom output)

07: IP Socket (bottom output)




Order Code

P . W . C . J . U . I . M




Product Diagrams

Polar Diagram

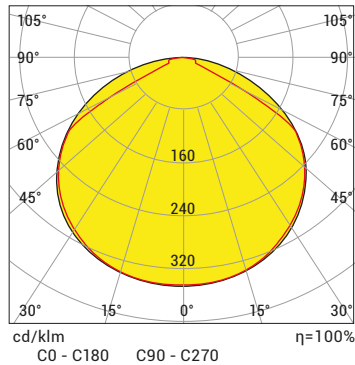


Conical Diagram

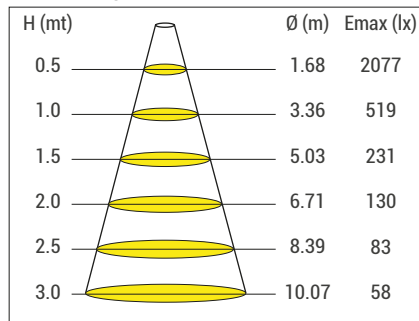

LLK 45 LED 18W CW 120D 24V DC IP20

U Upper Cover Options

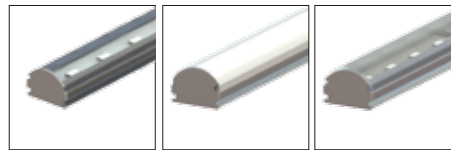

0: Coverless
(IP20)


01: Diffused
(IP40/IP66)

02: Transparent
(IP40/IP66)

I IP Protection Class



M Mounting Options

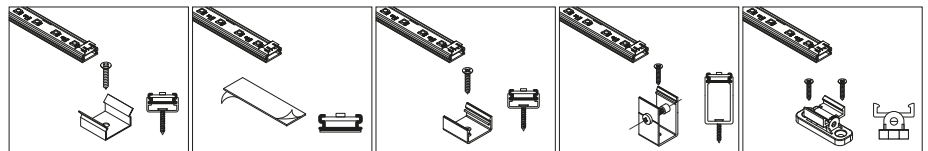

01: Steel Clip

02: Double-Sided Tape

03: Aluminum Clip

04: Aluminum Clip (tall)

05: Angled Clip

Control System Options

Color Type	PWM	INV PWM	DMX	DALI	0-10V DC	TRIAC
WW-NW-CW	•			•	•	
R,G,B,A	•			•	•	
RGB	•					
RGBA/W	•		•			
RGB DMX	•					
WHITE DMX	•					

