

- Min. 20 micron anodized aluminum extruded profile
- Anodized aluminum housing
- Rubber power cable
- Stainless connectors
- Insulated, PVC side cover
- UV protective transparent tube
- Cooling capacity up to 21,6 W/m
- Suitable for surface mounting

P W Product & Power Options

Product Name/LED Quantity	Light Color	Input Voltage (V)	Power (W/mt)	Luminous Flux (lm)	Weight (kg)
LLUT30LED	WW-NW-CW	24V DC	2,4	245	0,455
LLUT30LED	WW-NW-CW	24V DC	4,8	485	0,455
LLUT45LED	WW-NW-CW	24V DC	7,2	615	0,455
LLUT45LED	WW-NW-CW	24V DC	10,8	1065	0,455
LLUT60LED	WW-NW-CW	24V DC	7,2	715	0,455
LLUT90LED	WW-NW-CW	24V DC	10,8	905	0,455
LLUT30LED	RGB	24V DC	7,2	-	0,455
LLUT45LED	RGB	24V DC	10,8	-	0,455
LLUT30LED-DMX	RGB - Pixel	24V DC	8,4	-	0,455
LLUT45LED-DMX	RGB - Pixel	24V DC	12,6	-	0,455


*Power and Lumen values provided are based off of a "cold white (CW) LED".

C Light Color Options

WW: Warm White 3000K	R: Red 625nm
NW: Natural White 4000K	G: Green 525nm
CW: Cold White 6500K	B: Blue 465nm
RGB	A: Amber 590nm

*Different colors are optional

K Cable Direction Options



01: Left input



03: Input and output



Order Code


P . W . C . K




Please contact our sales representatives for special application requests other than the standard product.

Product Diagrams

Polar Diagram

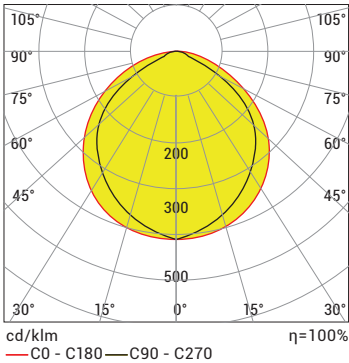


Conical Diagram

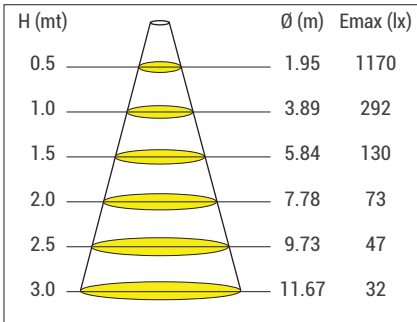

LLUT 45 LED CW 120D 10.8W 24V DCIP68

Control System Options

Color Type	PWM	INV PWM	DMX	DALI	0-10V DC	TRIAC
WW-NW-CW	•			•	•	
R,G,B,A	•			•	•	
RGB	•					
RGBA/W	•					
RGB DMX			•			
WHITE DMX			•			

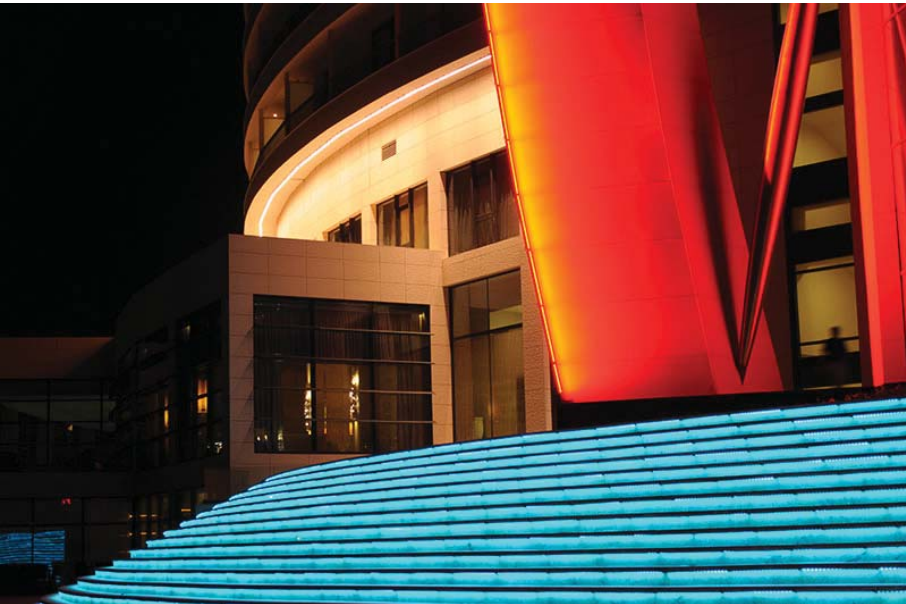

Stair Lighting



Pool Lighting

