

- High efficiency waterproof LED luminaire
- Extruded PC body
- UV protected PVC end caps
- High efficiency diffuser with homogeneous light output
- Stainless fittings
- Optional DALI and Emergency Kit

P W Product & Power Options

Product Name	Light Color	Input Voltage (V)	Power (W)	Luminous Flux (lm)	Length (mm)	Weight (kg)
RODA60	WW-NW-CW	220V-240 AC	22	2.440	624	0,7
RODA120	WW-NW-CW	220V-240 AC	29	3.210	1224	1,3
RODA120	WW-NW-CW	220V-240 AC	40	4.440	1224	1,3
RODA160	WW-NW-CW	220V-240 AC	55	6.105	1624	2,1

*Power and Lumen values provided are based off of a "cold white (CW) LED".

C Light Color Options

● WW: Warm White	3000K
● NW: Natural White	4000K
● CW: Cold White	6500K


S Driver Options

- 01 Standard Driver
- 06 DALI Driver
- ACK Emergency Lighting Kit 3h




Order Code

P . W . C . S




Product Diagrams

Polar Diagram

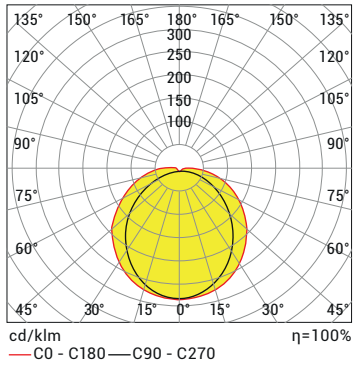

Conical Diagram

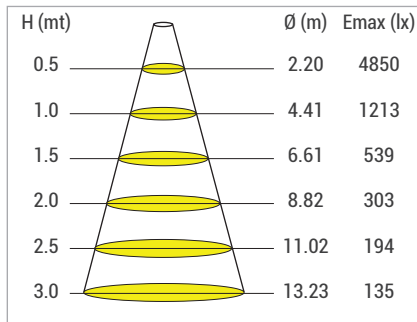

RODA120 CW65 40W 220VAC IP65

Control System Options

Color Type	PWM	INV PWM	DMX	DALI	0-10V DC	TRIAC
WW-NW-CW				•	•	
R,G,B,A						
RGB						
RGBA/W						
RGB DMX						
WHITE DMX						