

- High efficiency waterproof LED luminaire
- Extruded PC body
- UV protected PVC end caps
- High efficiency diffuser with homogeneous light output
- Stainless fittings

P W Product & Power Options

Product Name	Light Color	Input Voltage (V)	Power (W)	Luminous Flux (lm)	Length (mm)	Weight (kg)
RODA 120-EVO	WW-NW-CW	220V-240 AC	36	3.967	1224	1,3

**Power and Lumen values provided are based off of a "cold white (CW) LED".*


C Light Color Options

● WW: Warm White	3000K
● NW: Natural White	4000K
● CW: Cold White	6500K




Order Code

P . W . C




Product Diagrams

Polar Diagram

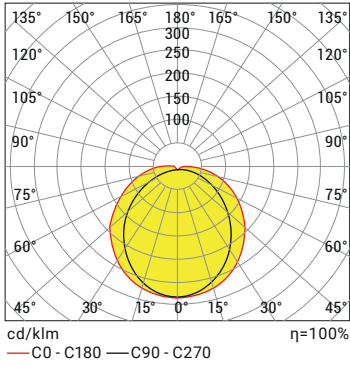

Conical Diagram

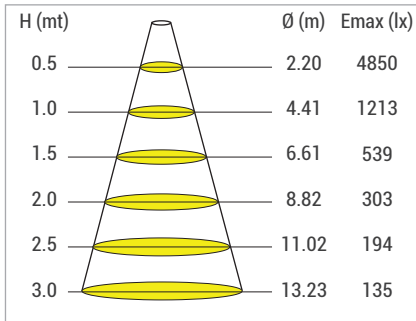

RODA120 CW65 36W 220VAC IP65

Control System Options

Color Type	PWM	INV PWM	DMX	DALI	0-10V DC	TRIAC
WW-NW-CW ● ● ●						



Namtek Factory, Denizli