

- Electrostatic powder coated aluminum injection housing
- High cooling capacity body design
- 4mm tempered luminaire glass
- Aluminum injection side covers
- Stainless fittings and clips
- Electrostatic painted DKP / Galvanized mounting feet

P W Product & Power Options

Product Name	Light Color	Input Voltage (V)	Power (W)	Luminous Flux (lm)	Weight (kg)
WH284	WW-NW-CW	220-240V AC	190	21.441	7,7
WH2112	WW-NW-CW	220-240V AC	250	30.000	7,9
WH2228	WW-NW-CW	220-240V AC	300	35.725	7,7
WH284	RGB	220-240V AC	147	-	10,3
WH284 DMX	RGB	220-240V AC	160	-	10,7
WH284-DMX	RGBW/A	220-240V AC	220	-	13,0

*Power and Lumen values provided are based off of a "cold white (CW) LED".

C Light Color Options


● WW: Warm White	3000K	● R: Red	625nm	● RGB
● NW: Natural White	4000K	● G: Green	525nm	● RGBW
● CW: Cold White	6500K	● B: Blue	465nm	● RGBA
		● A: Amber	590nm	

*Different colors are optional

S Driver Options

- 01 Standard Driver
- 06 DALI Driver


O Lens Options

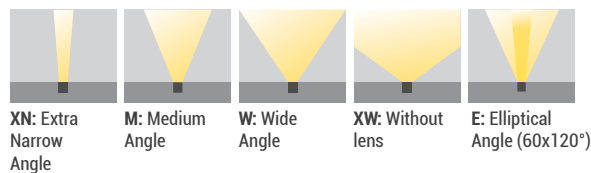

G Housing Color Options




J Junction Options




Order Code

P . W . C . S . O . G . J




Product Diagrams

Polar Diagram

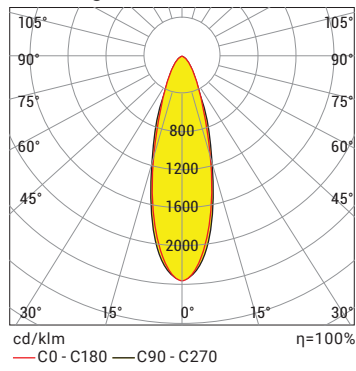


Conical Diagram

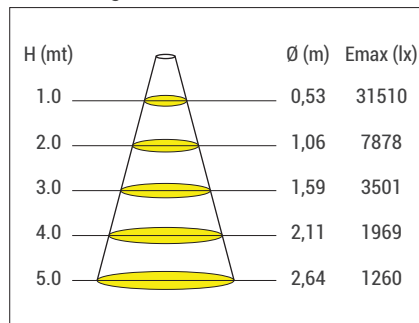


WH154 CW 25D 130W 220V AC IP66

Polar Diagram

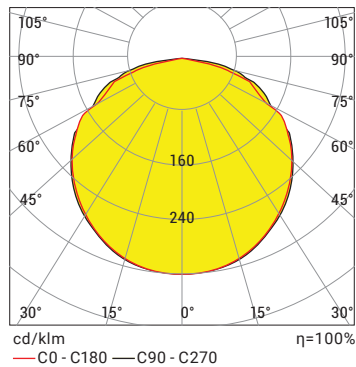

Conical Diagram

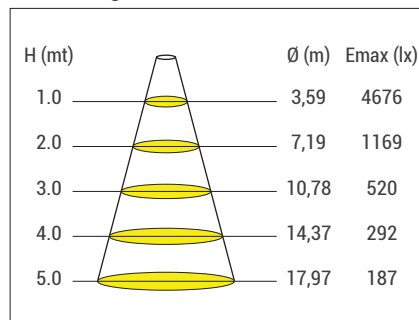

WH154 CW 120D 130W 220V AC



Control System Options

Color Type	PWM	INV PWM	DMX	DALI	0-10V DC	TRIAC
WW-NW-CW	•		•	•	•	
R,G,B,A	•		•	•	•	
RGB	•					
RGBA/W	•		•			
RGB DMX			•			
WHITE DMX			•			

Product Code	Voltage (V DC)	Control Systems	Cable Core Quantity		
			Mono	RGB	RGB W/A
WH136	24	INV-PWM	3x	5x	-
WH154	24	INV-PWM	3x	5x	-
WH284	24	INV-PWM	3x	5x	6x



Aspendos Antique Theater, Antalya