

- Electrostatic powder coated aluminum injection housing
- High cooling capacity body design
- 4mm, tempered luminaire glass
- Stainless fittings and clips
- Electrostatic painted DKP / Galvanized mounting feet

P W Product & Power Options

Product Name	Light Color	Input Voltage (V)	Power (W)	Luminous Flux (lm)	Weight (kg)
WH16	WW-NW-CW	220-240V AC	130	19.119	6,9
WH16	WW-NW-CW	220-240V AC	150	22.627	6,9
WH16	WW-NW-CW	220-240V AC	170	24.470	6,9
WH16	WW-NW-CW	220-240V AC	200	27.393	6,9

*Power and Lumen values provided are based off of a "(90°) cold white (CW) LED".

C Light Color Options


● WW: Warm White	3000K
● NW: Natural White	4000K
● CW: Cold White	6500K

*Different colors are optional


S Driver Options

- 01 Standard Driver
- 06 DALI Driver

O Lens Options

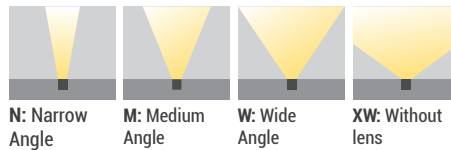


G Housing Color Options




Order Code

P . W . C . S . O . G



Product Diagrams

Polar Diagram

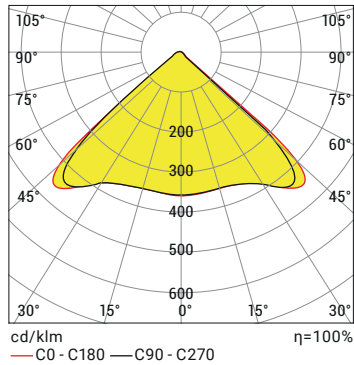

Conical Diagram

H (mt)	Ø (m)	E _{max} (lx)
0,5	0,44	34109
1,0	0,87	8527
1,5	1,31	3790
2,0	1,75	2132
2,5	2,18	1364
3,0	2,62	947

WH16 108 CW 30D 60W 220V AC IP66

Control System Options

Color Type	PWM	INV PWM	DMX	DALI	0-10V DC	TRIAC
WW-NW-CW				•	•	
R,G,B,A						
RGB						
RGBA/W						
RGB DMX						
WHITE DMX						



Langırt Sports Facilities, İzmir