

- Electrostatic powder painted aluminium body
- High efficiency aluminum reflector
- Compact connection accessories
- Architectural simple design
- 1m pendant cord

P W Product & Power Options

| Product Name | Light Color | Input Voltage (V) | Power (W) | Luminous Flux (lm) | Dimensions (AxB) (mm) | Weight (kg) |
|--------------|-------------|-------------------|-----------|--------------------|-----------------------|-------------|
| YONJA50-S | WW-NW | 220-240V AC | 10 | 850 | Ø55x110 | 0,4 |
| YONJA85-S | WW-NW | 220-240V AC | 20 | 1.800 | Ø90x185 | 0,5 |
| YONJA110-S | WW-NW | 220-240V AC | 30 | 2.550 | Ø115x200 | 0,8 |
| YONJA110-S | WW-NW | 220-240V AC | 40 | 3.200 | Ø115x200 | 0,85 |

*Power and Lumen values provided are based off of a "natural white (NW) LED".

C Light Color Options

| | |
|---------------------|-------|
| ● WW: Warm White | 3000K |
| ● NW: Natural White | 4000K |

S Driver Options

- 01 Standard Driver
- 06 *DALI Driver
- 11 *Driver + Emergency Lighting Kit 1h
- 12 *Driver + Emergency Lighting Kit 3h

* Suitable for Yonja85 and Yonja110

O Lens Options



N: Narrow Angle

M: Medium Angle

W*: Wide Angle

* Suitable for Yonja110

G Housing Color Options



RAL9005

RAL9016

U Upper Pieces Options



35: Black Reflector


36: Light Diffuser (Honeycomb)

Products with black reflector




Order Code

P . W . C . S . O . G . U




Product Diagrams

Polar Diagram

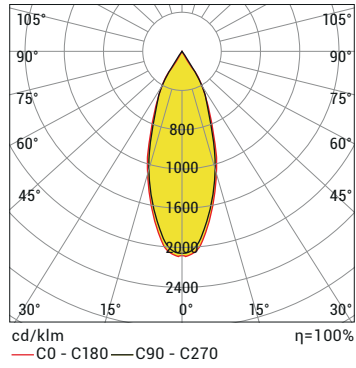


Conical Diagram

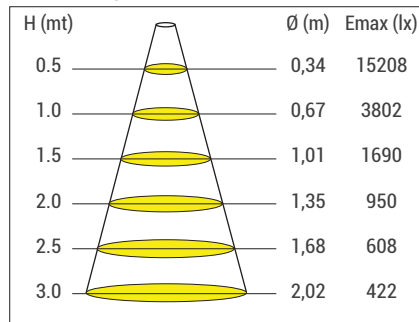

YONJA85 NW40 40D 20W 220V AC IP40

Control System Options

| Color Type | PWM | INV PWM | DMX | DALI | 0-10V DC | TRIAC |
|------------|-----|---------|-----|------|----------|-------|
| WW-NW-CW | | | | • | • | |
| R,G,B,A | | | | | | |
| RGB | | | | | | |
| RGBA/W | | | | | | |
| RGB DMX | | | | | | |
| WHITE DMX | | | | | | |

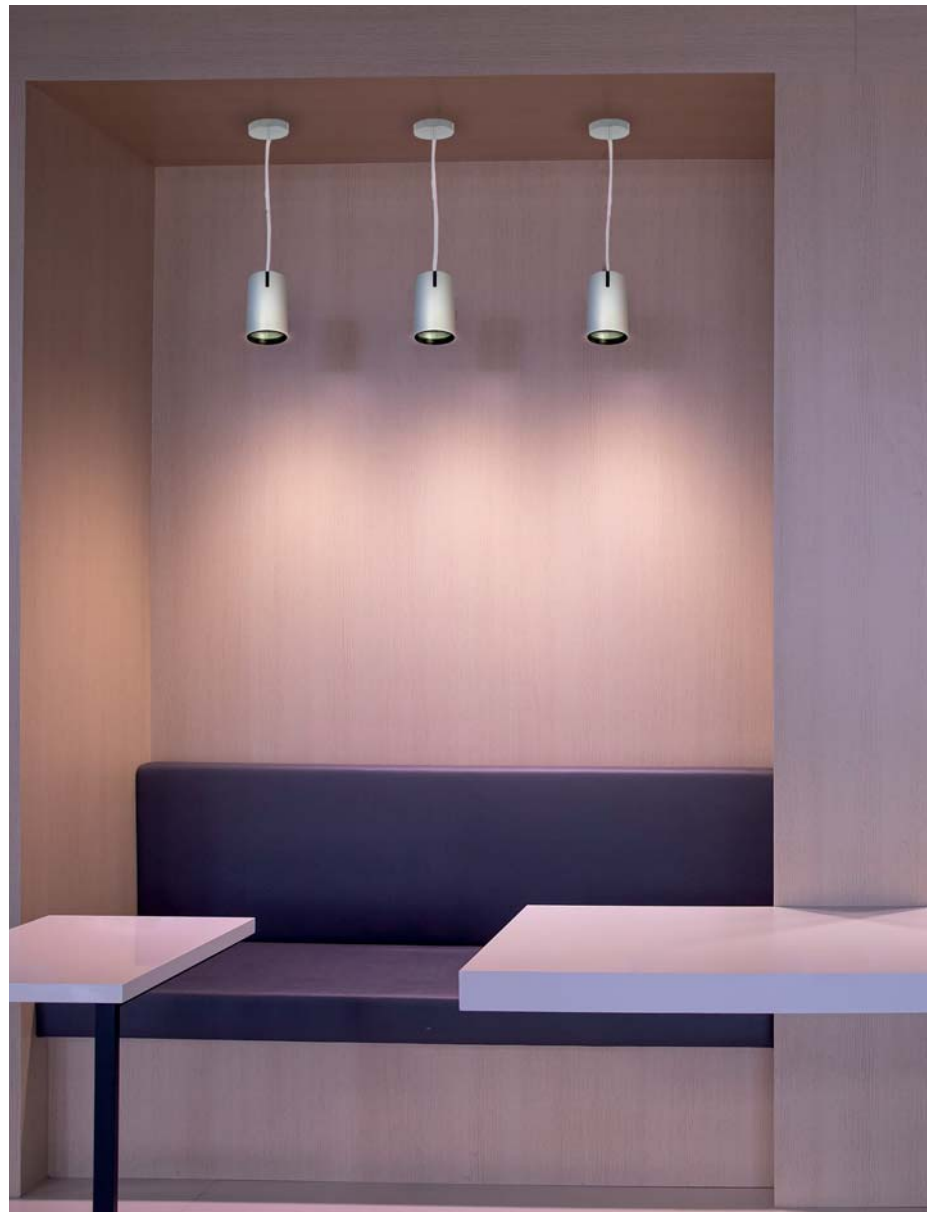

CW Energy, Antalya