

- Min. 20 micron anodized aluminum extruded profile
- High efficient homogeneous light by plexiglas diffused cover
- Suitable for pendant mounting
- Product length standards are; 90cm, 120cm, 150cm and 180cm
- Different colors are applicable for the housing
- 1,5 m steel wire hangers are included
- The number of the hangers in the package may vary regarding the product size

P W Product & Power Options


Product Name	Light Color	Input Voltage (V)	Power (W)	Luminous Flux (lm)	Diameter (B) (mm)	Weight (kg)
YZKd90	WW-NW-CW	24V DC	40	3.000	900	4,7
YZKd90	WW-NW-CW	24V DC	80	6.000	900	4,7
YZKd120	WW-NW-CW	24V DC	60	4.500	1200	6,2
YZKd120	WW-NW-CW	24V DC	120	9.000	1200	6,2
YZKd150	WW-NW-CW	24V DC	75	5.625	1500	7,8
YZKd150	WW-NW-CW	24V DC	150	11.250	1500	7,8
YZKd180	WW-NW-CW	24V DC	90	6.750	1800	9,3
YZKd180	WW-NW-CW	24V DC	180	13.500	1800	9,3

*Power and Lumen values provided are based off of a cold white (CW) LED.


C Light Color Options

● WW: Warm White	3000K
● NW: Natural White	4000K
● CW: Cold White	6500K

G Housing Color/Coating Options

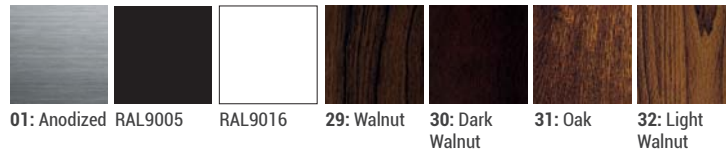

Mounting Accessory

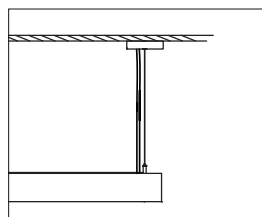


Driver box
(220V LED Driver included)



Order Code

P . W . C . G



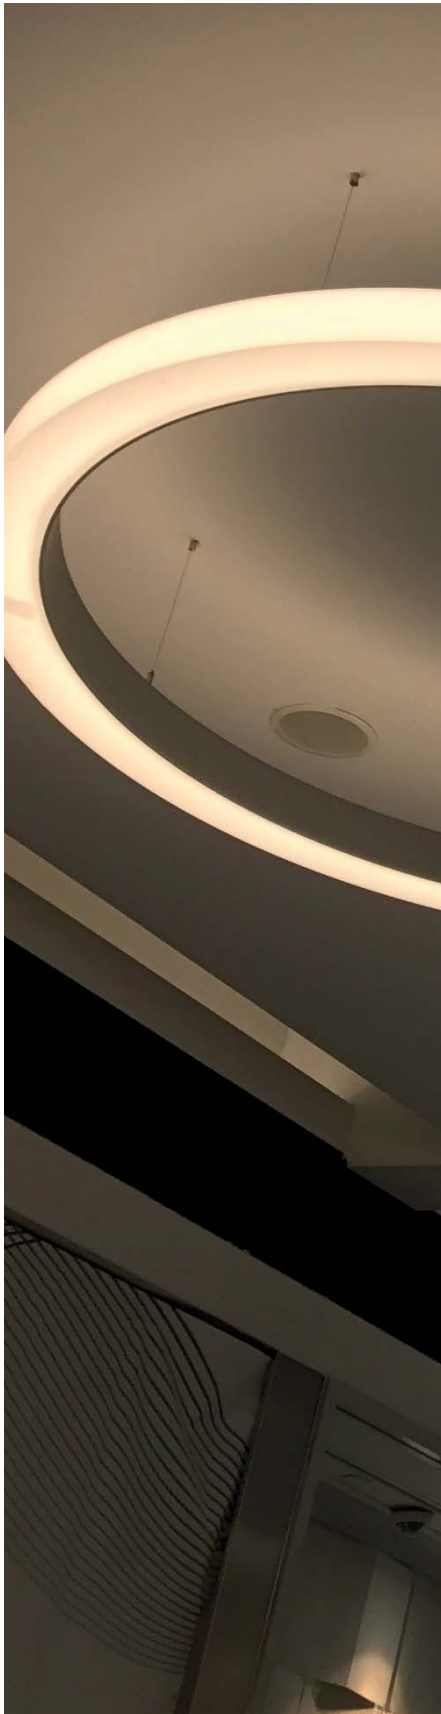

Control System Options

	Color Type	PWM	INV PWM	DMX	DALI	0-10V DC	TRIAC
WW-NW-CW		•			•	•	
DW		•			•	•	
R,G,B,A		•			•	•	
RGB		•			•	•	
RGBA/W							
RGB DMX				•			
WHITE DMX				•			



Riviera Mall, Russia