

- 316L chrome spot frame
- 316L chrome body
- 8 mm tempered glass
- Stainless connectors
- Plastic injection mounting box
- Operates with alternate or direct current
- Underwater connector
- H07RNF rubber cable

P W Product & Power Options

Product Name	Light Color	Input Voltage (V)	Power (W)	Luminous Flux (lm)	Weight (kg)
AC1F03	WW-NW-CW	12-24V DC	4	410	0,5
AC1F03	WW-NW-CW	12-24V DC	8	820	0,5
AC1F03	RGB	7,5V DC	8	-	0,5

Power and Lumen values provided are based off of a lensless product with cold white (CW) LED. It may vary according to the desired color.

C Light Color Options

WW: Warm White	3000K	R: Red	625nm
NW: Natural White	4000K	G: Green	525nm
CW: Cold White	6500K	B: Blue	465nm
RGB		A: Amber	590nm

S System Options

- 01 Standart (ON/OFF)
- 02 PWM-DIM

O Lens Options



N: Narrow Angle XW: Without lens

Mounting




Order Code

P . W . C . S . O




Product Diagrams

Polar Diagram

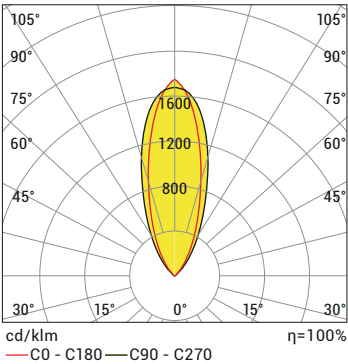

Conical Diagram

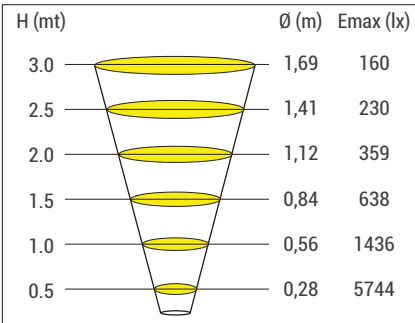

AC1F 3LED CW 8W 12-24V DC IP68

Control System Options

Color Type	PWM	INV PWM	DMX	DALI	0-10V DC	TRIAC
WW-NW-CW	•			•	•	
R,G,B,A	•			•	•	
RGB	•					
RGBA/W	•					
RGB DMX	•					
WHITE DMX	•					

Product Code	Voltage (V DC)	Control Systems	Cable Core Quantity		
			Mono	RGB	RGB W/A
AC1F03	7,5	PWM	2x	-	-
	12	PWM	-	4x	-
	12-24	ON/OFF	2x	-	-



Royal Taj Mahal Hotel, Antalya

