

- Professional decorative pendant LED lighting
- Optical solutions with 5 different beam angles
- Electrostatic powder-coated aluminum body
- Operating temperature: -30 to +50 °C
- Optional honeycomb louver
- Sleek and aesthetic design

## P W Product & Power Options

Product Name	Light Color	Input Voltage (V)	Power (W)	Weight (kg)
KUSS	WW-NW-CW	220-240VAC	1,5	0,9
KUSS	WW-NW-CW	24V DC	1,5	0,9

\*Power and Lumen values provided are based off of a cold white (CW) LED.


## C Light Color Options

● WW: Warm White	3000K	● R: Red	625nm
● NW: Natural White	4000K	● G: Green	525nm
● CW: Cold White	6500K	● B: Blue	465nm
		● A: Amber	590nm

## G Body Color Options



## M Mountain Options



24: Pendant

## O Lens Options



XN: Extra Narrow Angle (10°)


N: Narrow Angle (25°)

M: Medium Angle (60°)

W: Wide Angle (90°)

XW: Without Lens

## B Body Type

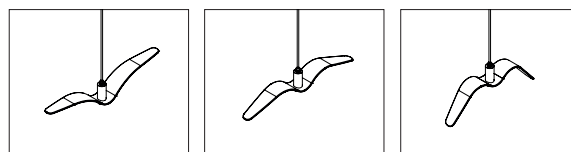

Upside Folded

Mid Folded

Downside Folded



Order Code

P . W . C . G . M . O . B

